

Wheel Features

Tread Material:	TPR	Core Material:	High Strength PP
Bearing:	Single Ball Bearing	Tread Hardness:	75A±3
Temperature:	-15°C~60°C	Running Speed:	3.2km/h

Note: Use beyond temperature range or beyond the recommended speed may shorten product life or even damage the product.



- ✔ Precision ball bearing, flexible rotation
- ✔ Advanced thermo-plastic rubber, silent running, elastic to protect floor
- ✔ Environmental protection, quiet, effectively protect the floor
- ✔ With plastic covers, thread-proof design
- ⚠ Economical material with common load capacity




Rolling resistance	■ ■ ■ □ □	Good
Wear resistance	■ ■ ■ □ □	Good
Operating noise	■ ■ ■ ■ ■	Excellent
Floor surface preservation	■ ■ ■ ■ ■	Excellent


Bracket Features

- ✔ ON/OFF pedals, stable braking effect, easy to operate
- ✔ Bracket made of pressed steel plate, firm and strong
- ✔ Hollow riveted structure, effortless to rotate
- ✔ Dustproof ring effectively protects grease for long service life
- ✔ Double springs plus cushion block design, outstanding shock absorption performance
- ✔ Chrome plating, bright and beautiful

Parameter (mm)							
Wheel Size	Capacity	Wheel Dia.	Wheel Width	Total Height	Offset	Swivel Radius	Swivel Radius
3"	80 kg	75	32	114.5	79	116.5	152
4"	90 kg	100	32	139	81	131	164
5"	100 kg	125	32	164.5	79	141	172.5

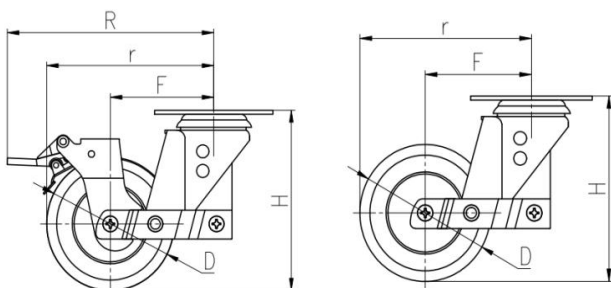


Mounting Drawing



Product ID			
Product Images			
Wheel Size	Plate swivel	Plate fixed	Plate swivel brake
3"	20E01-1593	20E03-1593	20E02-1593
4"	20E04-1594	20E06-1594	20E05-1594
5"	20E07-1595	20E09-1595	20E08-1595

Product Details



The performance of double spring damping structure is superior, which can effectively buffer and ensure the balance and stability.



The surface treatment of the bracket is chrome plated, smooth and beautiful.

ON/OFF brake is easy to operate.



Artificial TPR wheel running without mute. Concave-convex plastic cover is beautiful and anti-winding.

