

Wheel Features

Tread Material:	PU	Core Material:	Steel Core
Bearing:	Ball Bearing	Tread Hardness:	95A±3
Temperature:	-25°C~60°C	Running Speed:	4km/h



Note: Use beyond temperature range or beyond the recommended speed may shorten product life or even damage the product.

- ✔ 2 precision ball bearings,flexible rotation
- ✔ Polyurethane on casting iron core,high load capacity,wear resistance,oil resistance
- ✔ Environmental protection,quiet,effectively protect the floor
- ✔ Blue-white galvanized,anti-rust and anti-corrosion
- ⚠ High temperature and humidity may shortened service life




Rolling resistance	■ ■ ■ ■ □	Very good
Wear resistance	■ ■ ■ ■ ■	Excellent
Operating noise	■ ■ ■ ■ □	Very good
Floor surface preservation	■ ■ ■ ■ □	Very good


Bracket Features

- ✔ Spindle equipped with precision bearing,quiet and flexible
- ✔ Bracket made of pressed steel plate,firm and strong
- ✔ Double springs plus cushion block design,outstanding shock absorption performance
- ✔ The height of the central shaft hole can be adjusted to meet different heights of installation
- ✔ Powder spray treatment,superior anti-rust and anti-corrosion performance,salt spray test over 72 hours

Parameter (mm)						
Wheel Size	Capacity	Wheel Dia.	Wheel Width	Total Height	Offset	Swivel Radius
4"	250 kg	100	40	154	31	81

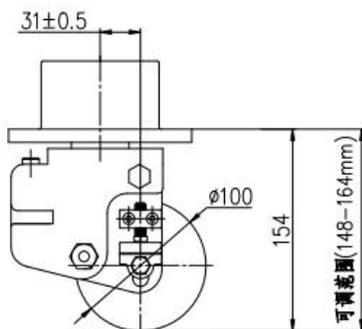

Mounting Drawing

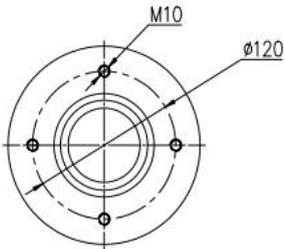

Product ID

Product Images



Wheel Size

Plate swivel

4"

70B01-1637

Product Details



The installation base is processed integrated molding to ensure the strength of the wheel.

The height adjustment device can adjust the height of 16mm, and also with shock absorption function, suitable for the complex floor.

